

ALASKA PLUS

AP / GC2

Code no. 12750




Mill

MM Kwidzyn, Poland

Last update of values 05.07.2022

1 Board structure

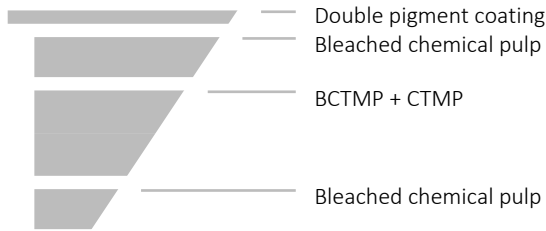

	% of total	+/- in % of total
Virgin fibre	90	5
Pigment coating	10	5
Total	100	

2 Technical specifications

Grammage	Caliper	Stiffness				Bending Resistance		Moisture (absolute) %
		Taber 15° md	Taber 15° cd	L&W 5° md	L&W 5° cd	L&W 15° md	L&W 15° cd	
g/m ²	µm	mNm	mNm	mNm	mNm	mN	mN	
190	320	7.7	3.9	13.9	7.0	160	80	7.8
205	350	10.1	5.1	18.2	9.2	210	105	7.8
220	385	12.5	6.2	22.7	11.3	260	130	7.8
235	425	16.0	7.7	28.7	14.0	330	160	8.0
245	440	17.8	8.5	32.2	15.3	370	175	8.0
255	470	20.5	10.2	37.0	18.3	425	210	8.0
270	500	24.3	11.6	44.0	20.9	505	240	8.2
280	520	27.0	13.1	48.8	23.5	560	270	8.2
305	570	35.0	16.1	63.1	29.2	725	335	8.4
330	620	44.9	19.8	80.9	35.6	930	410	8.4

3

Property	Value	Tolerances	Test standard
Brightness top	91	+/- 1.0	ISO 2470-2
Brightness reverse	> 70		ISO 2470-2
Smoothness PPS top (µm)		≤ 1.3	PN-ISO 8791-4
Gloss 75° (%)	> 40		ISO 8254-1
Ply Bond (J/m ²)	> 100		TAPPI 569 om -14
Surface Strength (medium viscosity IGT oil) (m/s)	≥ 1.00		ISO 3783
Cobb 60 sec. top (g/m ²)	< 55		ISO 535
Cobb 60 sec. reverse (g/m ²)	< 70		ISO 535
Grammage (g/m ²)		+/- 4%	PN-EN ISO 536
Caliper (µm)		+/- 4%; max. 20µm	PN-EN ISO 534
Stiffness (mNm)		-15% ¹	PN-ISO 2493
Moisture absolute (%)		+/- 1%-units	PN-EN ISO 287
Testing climate	23°C 50%	+/- 1°C +/- 2% rh	EN ISO 187
Recyclability	confirmed	in terms of the norm	EN 13430

¹Permissible: -15% of the target stiffness. Tolerances are based on single measurements of random sheets and a 95% confidence level. The stiffness has to be measured at both sides. Taber figures are binding, L&W figures are indicative. All figures mentioned above may be subject to technical changes.

ALASKA PLUS

AP / GC2 / Virgin Fibre Cartonboard

Code no. 12750



Mill
MM Kwidzyn, POLAND

Last update of values 15.06.2022



ALASKA PLUS enables excellent efficiency in packaging production thanks to superior printability, die-cutting, creasing, folding and gluing properties. Its quality parameters are optimized both for the production of the most creative packaging designs that use various printing techniques as well as packaging that ensures high reliability on automatic packaging lines.

Brightness

Top

91 %

1 Features

- Consistent quality
- Very good stiffness
- High surface smoothness and brightness
- Great embossing quality

2 Applications*

- Dry Food
- Chocolate and Confectionery
- Pharma and Health Care
- Cosmetics and Personal Care
- Tobacco
- Other Non-Foods

3 Mill Certificates

Downloadable certifications

Forest management

FSC® [SGSCH-COC-002560](#)

PEFC™ [CU-PEFC_837028](#)

Environmental manag. [ISO 14001](#)

Quality management [ISO 9001](#)

Energy management [ISO 50001](#)

Health & safety [ISO 45001](#)

4 Mill Information

MM Kwidzyn (Poland) offers the following features:

- A leading European manufacturer of premium virgin fiber cardboard, packaging kraft papers and uncoated fine papers
- Operates with four best-in-class cartonboard and paper machines and a fully integrated pulp mill
- Consistent, top quality of products obtained thanks to superior tailor-made pulp produced on site
- Experienced, innovative production team and professional technical support

5 Storage Recommendation

Storage conditions	temperature	relative humidity
Favorable dust free, climatized	20-25°C	40-55%

Please store in undamaged original wrapping film.

6 Acclimatisation

Temperature difference Pallet to printing room 20°C	Time in printing room before unpacking in hours
5°C	10 11 12
10°C	20 22 24
15°C	30 34 35
20°C	40 46 50
Volume of pallet in m ³	0.7 1.0 1.4

Remove the packaging film just before printing. Optimum processing climate: 22-23°C, 50-52% rel. humidity.

*It is a general recommendation for enduse applications; legally binding are only the declaration of compliance and the sensory statement issued by MM Board & Paper for each individual type of cartonboard.

If you are interested in Alaska Plus or have any further questions, please contact

marketing-boardpaper@mm.group

www.mm-boardpaper.com

[General Terms of Trade](#)